

Specification Sheet

Supersonic Desk Screen



Supersonic Desk Screen

PRODUCT DESCRIPTION

The Akuart Supersonic Desk Screen is the natural choice for privacy and quiet comfort at your workstation. It is carefully designed to interrupt speech from one workstation to another and has an extensive range of design options. The screen has 3 different mounting positions and comes with a variety of special features including a vast colour range the characteristic Akuart changeable canvas and a design for disassembly product philosophy making it possible to recycle every component of the screen.

FEATURES

- Changeable canvas: Front & backside canvas can easily be removed without having to disassemble the screen.
- Canvas design: The Akuart printed canvas offers a vast range of design options including colours, printed textures, graphics, signage and more.
- Pinnable: The screen has a soft pinnable surface on both sides of the screen.
- Reinforced Corners: Metal inserts in the corners ensure that the frame is assembled without exposed and sharp edges.
- An extended range of frame colours: 24 standard fine structured powder coated frame colours to choose from.

DIMENSIONS – Frame depth: 50mm



LOW VERSION:

w:600 x h:450 mm
w:800 x h:450 mm
w:1200 x h:450 mm
w:1400 x h:450 mm
w:1600 x h:450 mm
w:1800 x h:450 mm
w:2000 x h:450 mm



HIGH VERSION:

w:600 x h:650 mm
w:800 x h:650 mm
w:1200 x h:650 mm
w:1400 x h:650 mm
w:1600 x h:650 mm
w:1800 x h:650 mm
w:2000 x h:650 mm

***BESPOKE SIZES** – The Supersonic Desk Screen can also be ordered in bespoke sizes:

HEIGHT: Min. 400mm – Max. 1000mm


LENGTH: Min. 400mm – Max. 2700mm

Supersonic Desk Screen

MOUNT


The Supersonic Desk Screen is attached to the desktop with clamp mounts. The mounts differ from regular mounts by having an additional adjustable function that ensures 3 different mounting positions and enables The Desk Screen to be tilted slightly back or forth. This secures that the screen is always vertically levelled, despite of any irregularities in surfaces. This feature also ensures that several desk screens align perfectly when placed continuously besides each other.

The Supersonic Desk Screen is mounted 10 cm below the desk top.

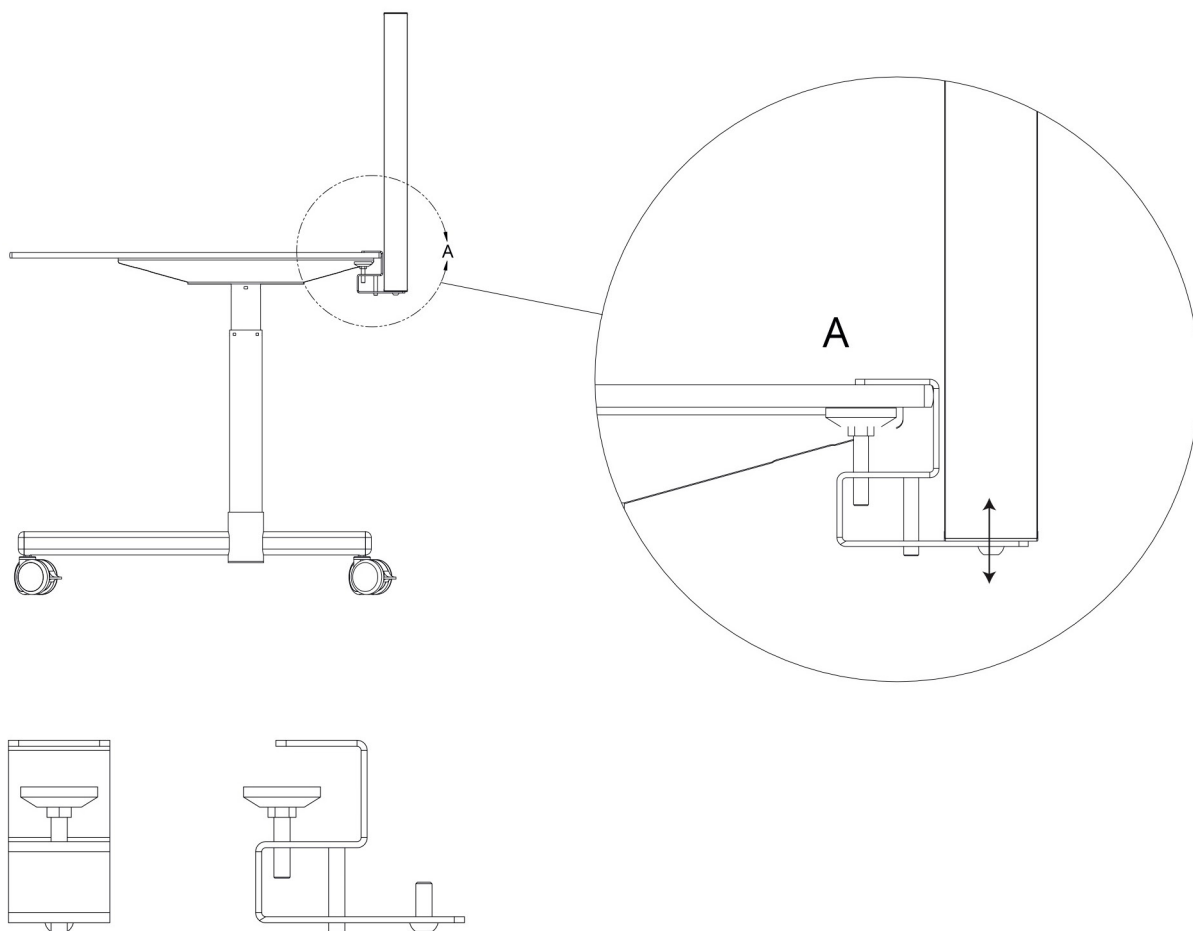

DESK TOP SPECIFICATIONS


Max. table top thickness: 4 cm
Max. length of bevel table top edge: 3 cm

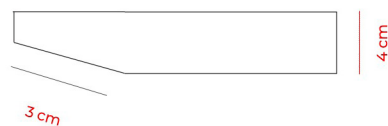

Supersonic Desk Screen

FRAME COLOURS / FINISHES

The Supersonic Desk Screen comes with a carefully curated colour range. It consists of 8 colours, each with three variations: Muted, Accent, Base.

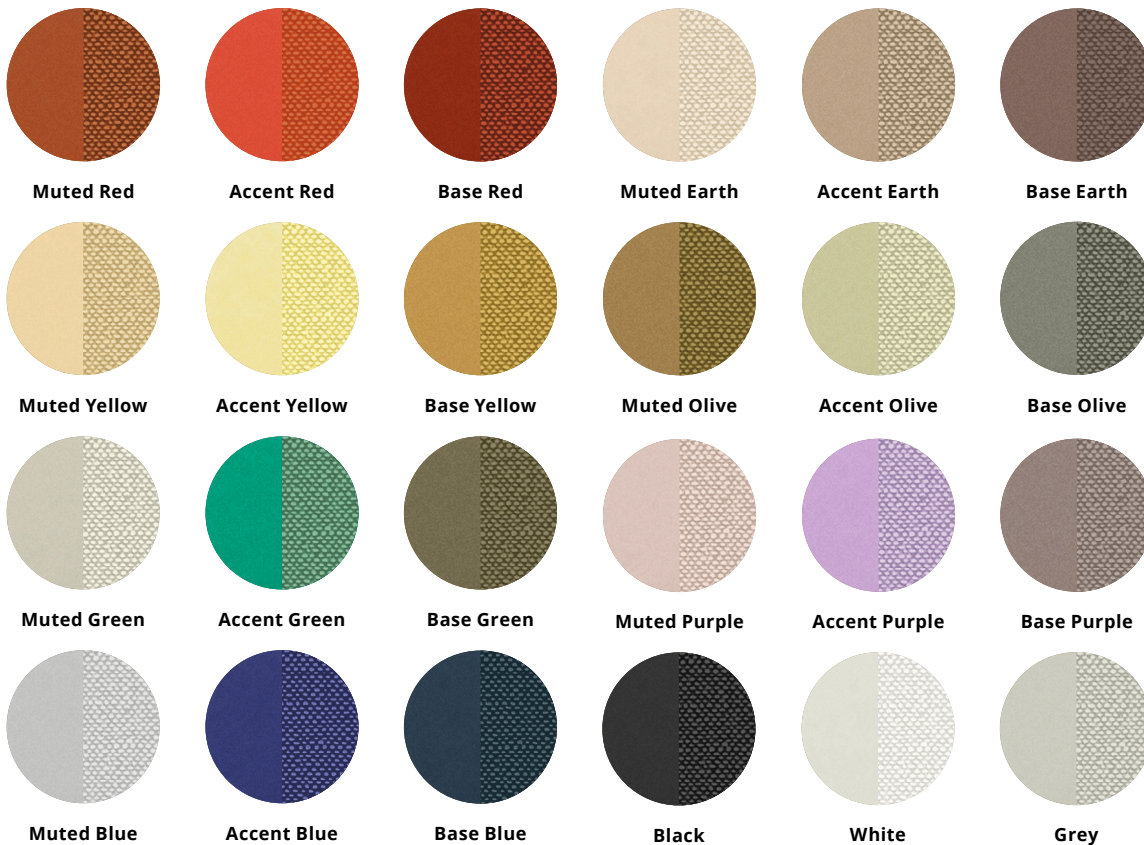

CANVAS DESIGN OPTIONS

/ Colours & Patterns - [EXPLORE THE RANGE](#)

/ Photography - [EXPLORE THE RANGE](#)

/ Custom Design - [DISCOVER CUSTOM SOLUTIONS](#)

Supersonic Desk Screen

COMPONENTS

Frame:	Aluminium with 75% upcycled post-consumer aluminium scrap. Fine structured powder coating.
Acoustic material:	50 mm PET with 50% fibres from recycled plastic bottles.
Canvas:	Changeable polyester textile made with 100% recycled polyester fibres.
Corner Inserts:	Fine structured powder coated metal.
Mounting:	Sub clamp mounts. Fine structured powder coating

CERTIFICATES

Frame:	Powder coating in compliance with REACH Regulation (EC) No 1907/2006 and CLP Regulation (EC) No 1272/2008.
Acoustic material:	EPD in accordance with ISO 14025 and EN 15804. In compliance with the REACH regulation EC 1907/2006. Reaction to fire classification B-s1,d0. Emission class M1. In compliance with Oeko-Tex Standard 100.
Canvas:	In compliance with Oeko-Tex Standard 100. Reaction to fire classification B-s1,d0. The ink fulfils the requirements for Oeko Tex Standard 100 and is in compliance with REACH regulations.

PRODUCT CARE

Canvas:	/ Regularly dust with a soft brush or vacuum to prevent dirt accumulation. / Treat stains on the canvas promptly to prevent them from setting. Absorb excess liquid immediately. / Use antibacterial wipes or sprays to disinfect, always following the manufacturer's instructions. / Machine washing is applicable for the detachable Supersonic Canvas. Remove the canvas carefully using the AKUART hand tag. The Canvas is washable at temperatures up to 60°C. Ensure it is completely dry before remounting.
Frame:	/ Regularly clean with a soft brush or vacuum to prevent dirt from accumulating. / Disinfect using antibacterial wipes or sprays, ensuring you follow the manufacturer's instructions.

Supersonic Desk Screen

SOUND ABSORPTION TEST

The acoustic efficiency is tested by third party acoustic engineers in a sound engineering laboratory at the Technical University of Denmark. This means that architects, building consultants and designers can count 100% on the acoustic characteristics of the desk screen.

ACOUSTIC FUNCTIONALITY

Equivalent sound absorption area
Test dimensions 2.16 m²

Freq. [Hz]	Equivalent sound absorption area		
	1/3-oct.	1/1-oct.	ref.-curve
100	1.06	1.20	
125	1.15		
160	1.35		
200	1.82	2.05	-
250	2.09		
315	2.25		
400	2.82	2.95	-
500	2.92		
630	3.04		
800	3.41	3.55	-
1000	3.61		
1250	3.65		
1600	3.79	3.75	-
2000	3.73		
2500	3.75		
3150	3.81	3.80	-
4000	3.82		
5000	3.84		

